



ULTRA-COMPACT GRANULATORS series SINCRO EKO

The new generation of ultra-compact granulators for copper and aluminum cable processing, SINCRO EKO, is available in 4 models with a capacity range from 50 to 400 kg/hr.

The evolution of the SINCRO EKO has allowed a considerable reduction in production costs, while maintaining the same quality that is the Guidetti marque.

The complete technical documentation allows the operator to fully understand the SINCRO EKO and, with its ease of use and maintenance, gives excellent production results.

The SINCRO EKO series offers the best performances on the market in terms of energetic consumption and cost of maintenance per kg of recovered metal.

These characteristics make the SINCRO EKO series the best in the field and allows the buyer to rapidly recover his investment.



sincro eko
line

MACHINES
FOR INDUSTRIAL
SCRAPS
RECYCLING

proudly
made in italy



Since 1919
GENSCO AMERICA, INC
5307 Dividend Dr., Decatur, Georgia 30035 • Tel: 770 808-8711 • Fax: 770 808-8739
ACROSS USA 800 268-6797
GENSCO EQUIPMENT (1990) Inc
53 Carlaw Ave., Toronto, Canada M4M 2R6 • Tel: 416 465-7521 • Fax: 416 465-4489
email: info@genscoequip.com • www.genscoequip.com




GENSCO

SINCRO 315 eko



M With manual feeding

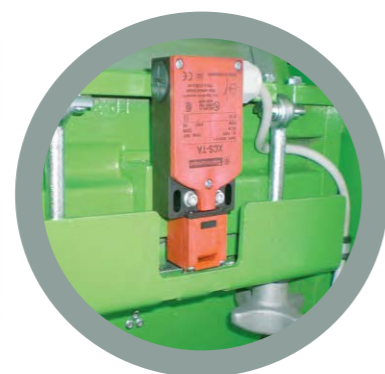

Conforms to CE rules



SINCRO 415 eko

SINCRO 215 eko



Easy maintenance

SINCRO 215 eko
single phase



single phase



Single phase

Example of automatic line

PMG 400 E ①


NT 400 ②

SINCRO 415 eko ③



SINCRO eko	Length	Width	Height	Weight	Installed Power	Production (up to)
SINCRO 215 eko	1060 mm	810 mm	1515 mm	360 kg	3,6 kW	65 kg/h (*)
SINCRO 215 eko	1060 mm	810 mm	1515 mm	350 kg	3,6 kW	65 kg/h (*)
SINCRO 315 eko	1130 mm	1010 mm	1565 mm	458 kg	6,1 kW	130 kg/h (*)
SINCRO 415 eko	1350 mm	1350 mm	2133 mm	950 kg	9,3 kW	200 kg/h (*)
SINCRO 530 eko	1600 mm	1350 mm	2171 mm	1200 kg	16,8 kW	400 kg/h (*)

* Varies based on kind of processed material.

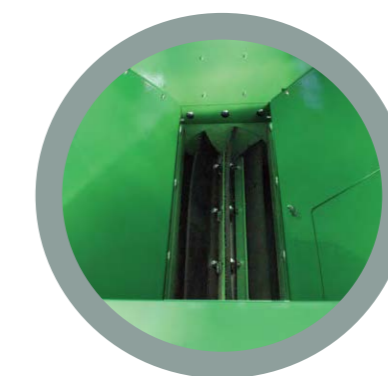

Rotary valve.



A With automatic feeding

SINCRO 530 eko